




SERVER TECHNOLOGY, INC
 PROPRIETARY INFORMATION

THIS DOCUMENT IS THE SOLE PROPERTY OF SERVER TECHNOLOGY, INC. THE RELEASE OF DATA CONTAINED IN THIS DOCUMENT AND THE REPRODUCTION OF THIS DOCUMENT, IN WHOLE OR IN PART, WITHOUT THE WRITTEN PERMISSION OF SERVER TECHNOLOGY, INC IS PROHIBITED.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW IS PROHIBITED.


RoHS COMPLIANT

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
-	1	INITIAL DESIGN	4/25/2011	MAR/

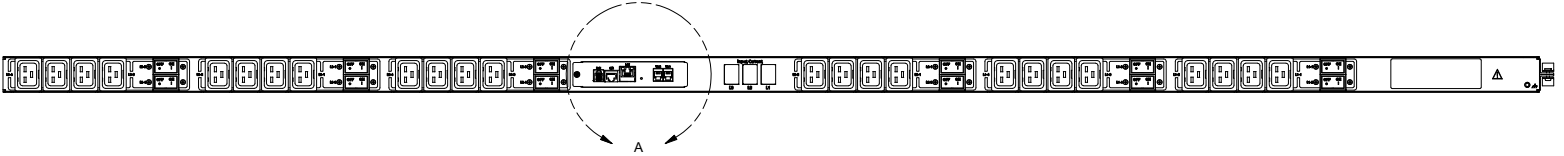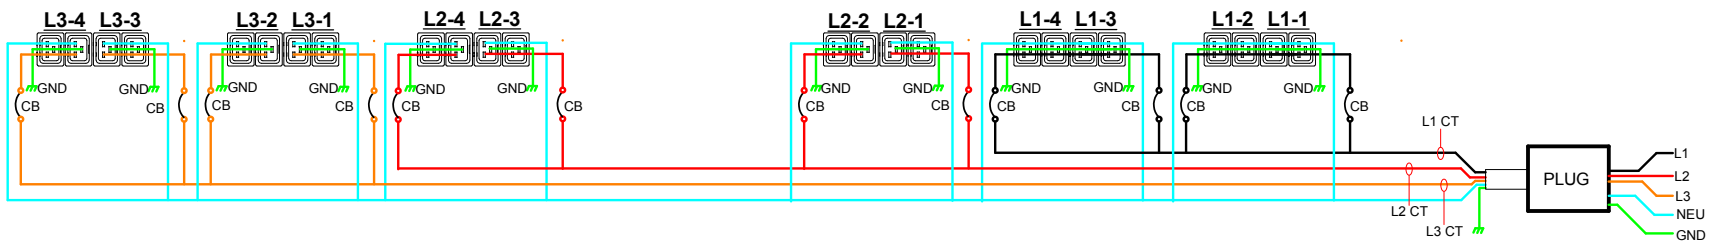

ISO VIEW

Part Number	Expansion	Input Rating, North America	GS	Input Type	Output Rating North America	GS	Outlet: North America GS	Outlet Type	Branch Circuit: North America / GS	Phase: North America / GS
CS-24V47454A3	CL-24V47454A3	230/400V 3W+N+PE, 50/60Hz; 63A		IEC 60309 63A	230V, 50/60Hz <= 189A		24xC19 <= 16A each	IEC 60320 C19	L1-1,-2,-3,-4, L2-1,-2,-3,-4, L3-1,-2,-3,-4, L4-1,-2,-3,-4 <= 16A	L1, L2, L3 <= 63A
CS-24V57454A3	CL-24V57454A3	240/415V 3W+N+PE, 50/60Hz; 48A		IEC 60309 48A	240V, 50/60Hz <= 144A		24xC19 <= 16A each	IEC 60320 C19	L1-1,-2,-3,-4, L2-1,-2,-3,-4, L3-1,-2,-3,-4, L4-1,-2,-3,-4 <= 20A	L1, L2, L3 <= 48A



DETAIL A
 SCALE 1 / 3
 'CL' LINKED UNIT

TOLERANCES (UNLESS OTHERWISE SPECIFIED) LINEAR DIMENSIONS: .X = ± .500 .XX = ± .300 .XXX = ± .150 ANGULAR DIMENSIONS: X = ± 1° X.X = ± .5° X.XX = ± .25° SYMBOLS: (Q#) = CRITICAL DIM. (S) = COSMETIC SURFACE	UNLESS OTHERWISE SPECIFIED * INTERPRET DRAWING IAW ASME Y14.100-2000 * DIMENSIONING & TOLERANCING IAW ASME Y14.5M-2007 * REMOVE ALL BURRS AND SHARP EDGES. 2/R MAX. * DIMENSIONS ARE IN MILLIMETERS * DIMENSIONAL LIMITS APPLY AFTER PLATING/COATING. DO NOT SCALE DRAWING MATERIAL: FINISH: VENDOR PART NO:	THIRD ANGLE PROJECTION 	
		APPROVALS DRAWN BY: mramsey CHECKED BY: MAR/TI APPROVED BY: MAR/TI RELEASED BY: MAR/TI	DATE 4/25/2011 4/26/2011 4/26/2011 4/26/2011

SERVERTECHNOLOGY, INC.
 1040 Sandhill Drive Reno, NV 89521

DRAWING TITLE:
SMART CDU MODEL #CS[CL]-24V5x, 60/63A, 400/415V, WIRING DIAGRAM

SIZE	CAGE CODE	DWG NO.	REV
B	04V90	495-0526-2	1
SCALE	NONE	FILE NO. 495-0526-2.kdw	SHEET 1 OF 1