SERVER TECHNOLOGY, INC
PROPRIETARY INFORMATION

THIS DOCUMENT IS THE SOLE PROPERTY OF SERVER TECHNOLOGY, INC. THE RELEASE OF DATA CONTAINED IN THIS DOCUMENT AND THE REPRODUCTION OF THIS DOCUMENT, IN WHOLE OR IN PART, WITHOUT THE WRITTEN PERMISSION OF SERVER TECHNOLOGY, INC IS PROHIBITED.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW IS PROHIBITED.

RoHS COMPLIANT

REVISIONS			
REV	DESCRIPTION	DATE	DFT/APPR
1	INITIAL DESIGN	08/04/2010	MAR/BA

NOTES:

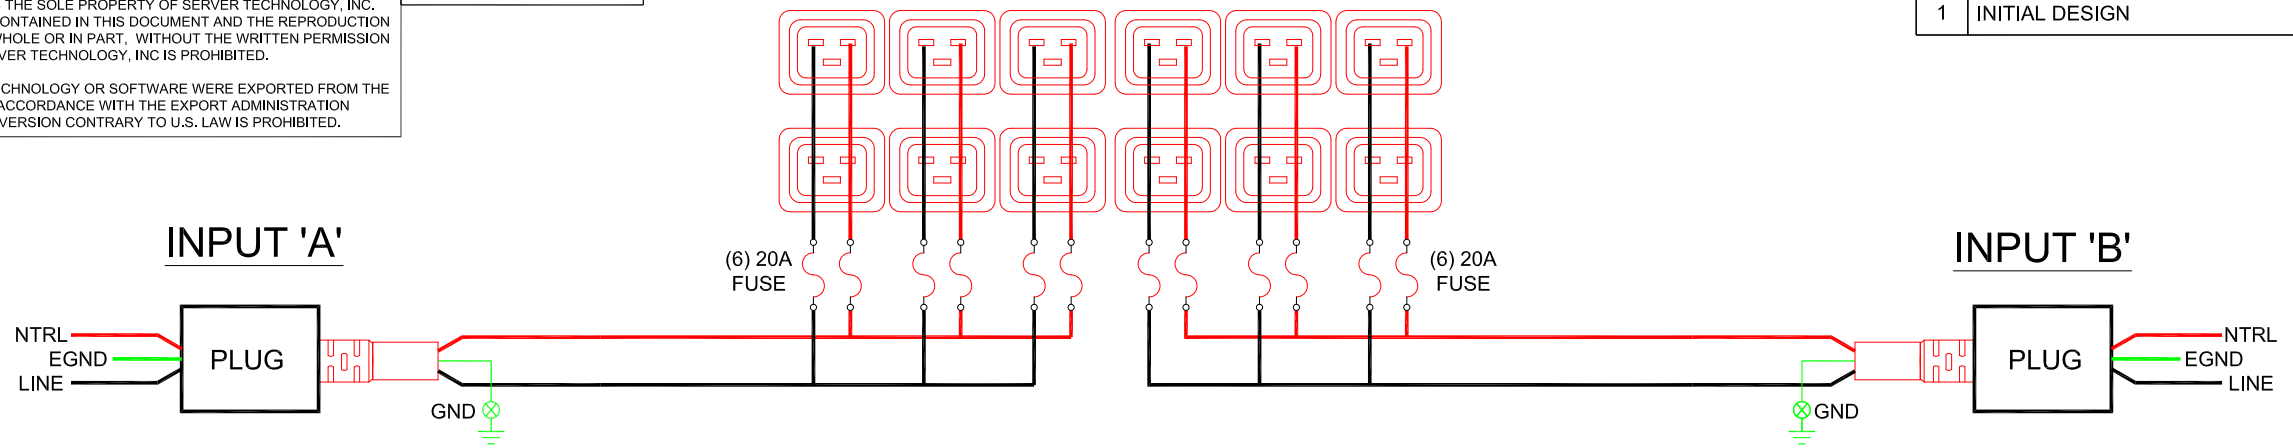

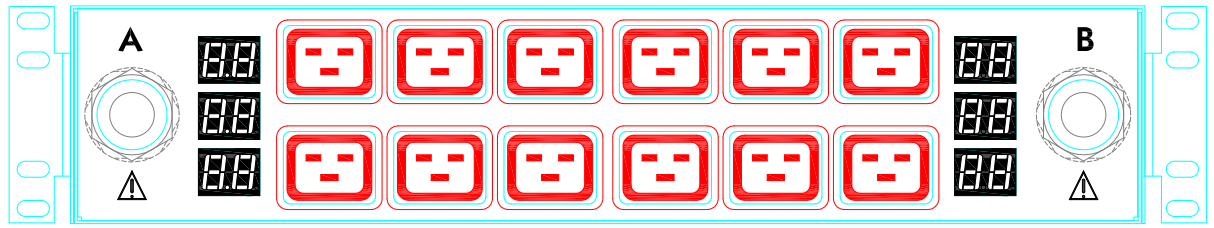

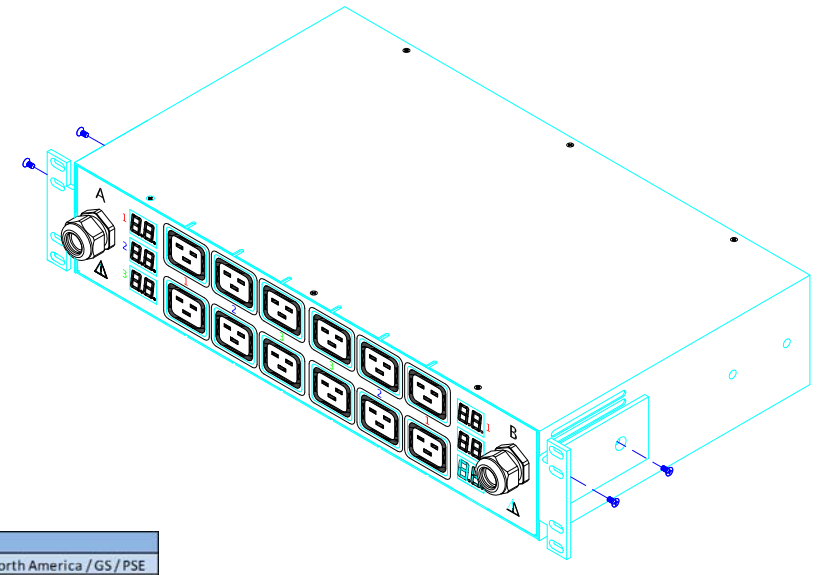

ISO VIEW

Part Number	Input				Output					
Model	Rating, North America	GS	PSE Japan	Input Type	Output Rating North America	GS	PSE Japan	Outlet: North America / GS / PSE	Outlet Type	Branch Circuit: North America / GS / PSE
C-12HD2-L20	208-240V, 50/60Hz; 2x16A			NEMA L6-20P	208-240V, 50/60Hz; A, B ≤ 16A			≤16A/ /	IEC 60320 C19	≤16A/ /
C-12HD2-L630	208-240V, 50/60Hz; 2x24A		200-240V, 50/60Hz; 2x30A	NEMA L6-30P	208-240V, 50/60Hz; A, B ≤ 24A		200-240V, 50/60Hz; A, B ≤ 30A	≤16A/ /≤20A	IEC 60320 C19	≤16A/ /≤20A
C-12HDE-30916E		230V, 50/60Hz; 2x16A		IEC 60309 16A		230V, 50/60Hz; A, B ≤ 16A		/≤16A/	IEC 60320 C19	/≤16A/
C-12HDE-30932E		230V, 50/60Hz; 2x32A		IEC 60309 32A		230V, 50/60Hz; A, B ≤ 32A		/≤16A/	IEC 60320 C19	/≤16A/
CS-12HD2-L20	208-240V, 50/60Hz; 2x16A			NEMA L6-20P	208-240V, 50/60Hz; A, B ≤ 16A			≤16A/ /	IEC 60320 C19	≤16A/ /
CS-12HD2-L630	208-240V, 50/60Hz; 2x24A		200-240V, 50/60Hz; 2x30A	NEMA L6-30P	208-240V, 50/60Hz; A, B ≤ 24A		200-240V, 50/60Hz; A, B ≤ 30A	≤16A/ /≤20A	IEC 60320 C19	≤16A/ /≤20A
CS-12HDE-30916E		230V, 50/60Hz; 2x16A		IEC 60309 16A		230V, 50/60Hz; A, B ≤ 16A		/≤16A/	IEC 60320 C19	/≤16A/
CS-12HDE-30932E		230V, 50/60Hz; 2x32A		IEC 60309 32A		230V, 50/60Hz; A, B ≤ 32A		/≤16A/	IEC 60320 C19	/≤16A/

TOLERANCES
(UNLESS OTHERWISE SPECIFIED)
LINEAR DIMENSIONS:
.X = ± .500
.XX = ± .300
.XXX = ± .130
ANGULAR DIMENSIONS:
X.X = ± .5°
X.XX = ± .25°

SYMBOLS
(Q#) = CRITICAL DIM.
(S) = COSMETIC SURFACE

UNLESS OTHERWISE SPECIFIED
* INTERPRET DRAWING IAW ASME Y14.100-2000
* DIMENSIONING & TOLERANCING IAW ASME Y14.5M-1994
* REMOVE ALL BURRS AND SHARP EDGES .2 R MAX
* DIMENSIONS ARE IN MILLIMETERS
* DIMENSIONAL LIMITS APPLY AFTER PLATING/COATING
DO NOT SCALE DRAWING
THIRD ANGLE PROJECTION

MATERIAL:
FINISH:

SERVER TECHNOLOGY, INC.
1040 Sandhill Drive Reno, NV 89521

DRAWING TITLE:
METERED CDU MODEL #C-12Hx-xxxx
SINGLE PHASE 208/240V
BASIC WIRING DIAGRAM

SIZE	CAGE CODE	DWG NO.	REV
B	04V90	495-0112-1	1

SCALE: 1/1 SHEET 1 OF 1