SERVER TECHNOLOGY, INC
PROPRIETARY INFORMATION

THIS DOCUMENT IS THE SOLE PROPERTY OF SERVER TECHNOLOGY INC.
THE RELEASE OF DATA CONTAINED IN THIS DOCUMENT AND THE REPRODUCTION OF THIS DOCUMENT, IN WHOLE OR IN PART, WITHOUT THE WRITTEN PERMISSION OF SERVER TECHNOLOGY INC IS PROHIBITED.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW IS PROHIBITED.

RoHS COMPLIANT

REVISIONS			
REV	DESCRIPTION	DATE	DFT/APPR
1	INITIAL DESIGN	08/04/2010	MAR/

NOTES:

NOTES:

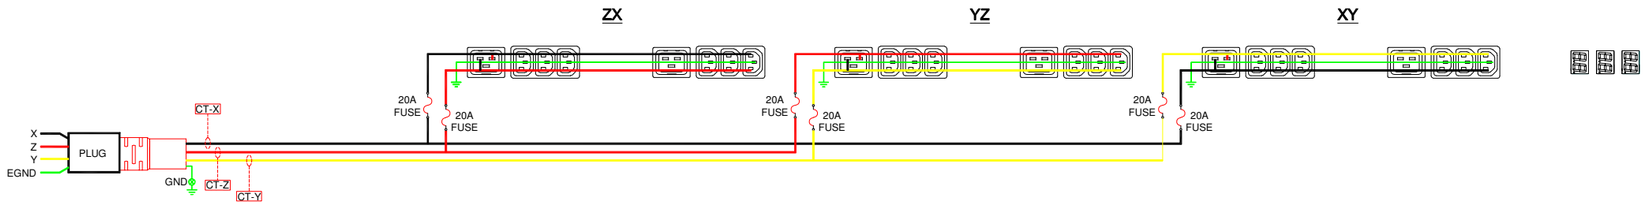



Part Number	Input			Output					
Model	Rating: North America	P3S: Japan	Input Type	Output Rating: North America	P3S: Japan	Outlet: North America / P3S	Outlet Type	Branch Circuit: North America / P3S	Phase: North America / P3S
C-24VD-L30MA	240V 5W+PE, 50/60Hz; 24A	240V 5W+PE, 50/60Hz; 30A	NEMA L15-30P	240V, 50/60Hz; @41.6A	240V, 50/60Hz; @32A	6xC19 @15.8A, 18xC15 @12A/6xC19 @20A, 18xC15 @15A	IEC 60320 C15 and C19	XY, YZ, XZ @15.8A/@17.5A	XY, YZ, XZ @15.8A/@17.5A
C-24VY-L30MA	120/208V 5W+N+PE, 50/60Hz; 24A		NEMA L15-30P	208V, 50/60Hz; @41.6A		6xC19 @15.8A, 18xC15 @12A/	IEC 60320 C15 and C19	XY, YZ, XZ @15.8A/	XY, YZ, XZ @15.8A/
CL-24VD-L30MA	240V 5W+PE, 50/60Hz; 16A		NEMA L15-30P	240V, 50/60Hz; @27.6A		6xC19 @9.2A, 18xC15 @9.2A/	IEC 60320 C15 and C19	XY, YZ, XZ @9.2A/	XY, YZ, XZ @9.2A/
CL-24VD-L30MA	240V 5W+PE, 50/60Hz; 24A	240V 5W+PE, 50/60Hz; 30A	NEMA L15-30P	240V, 50/60Hz; @41.6A	240V, 50/60Hz; @32A	6xC19 @15.8A, 18xC15 @12A/6xC19 @20A, 18xC15 @15A	IEC 60320 C15 and C19	XY, YZ, XZ @15.8A/@17.5A	XY, YZ, XZ @15.8A/@17.5A
CL-24VY-L30MA	120/208V 5W+N+PE, 50/60Hz; 16A		NEMA L21-30P	208V, 50/60Hz; @27.6A		6xC19 @9.2A, 18xC15 @9.2A/	IEC 60320 C15 and C19	XY, YZ, XZ @9.2A/	XY, YZ, XZ @9.2A/
CL-24VY-L30MA	120/208V 5W+N+PE, 50/60Hz; 24A		NEMA L21-30P	208V, 50/60Hz; @41.6A		6xC19 @15.8A, 18xC15 @12A/	IEC 60320 C15 and C19	XY, YZ, XZ @15.8A/	XY, YZ, XZ @15.8A/
C5-24VD-L30MA	240V 5W+PE, 50/60Hz; 16A		NEMA L15-30P	240V, 50/60Hz; @27.6A		6xC19 @9.2A, 18xC15 @9.2A/	IEC 60320 C15 and C19	XY, YZ, XZ @9.2A/	XY, YZ, XZ @9.2A/
C5-24VD-L30MA	240V 5W+PE, 50/60Hz; 24A	240V 5W+PE, 50/60Hz; 30A	NEMA L15-30P	240V, 50/60Hz; @41.6A	240V, 50/60Hz; @32A	6xC19 @15.8A, 18xC15 @12A/6xC19 @20A, 18xC15 @15A	IEC 60320 C15 and C19	XY, YZ, XZ @15.8A/@17.5A	XY, YZ, XZ @15.8A/@17.5A
C5-24VY-L20MA	120/208V 5W+N+PE, 50/60Hz; 16A		NEMA L21-20P	208V, 50/60Hz; @27.6A		6xC19 @9.2A, 18xC15 @9.2A/	IEC 60320 C15 and C19	XY, YZ, XZ @9.2A/	XY, YZ, XZ @9.2A/
C5-24VY-L20MA	120/208V 5W+N+PE, 50/60Hz; 24A		NEMA L21-20P	208V, 50/60Hz; @41.6A		6xC19 @15.8A, 18xC15 @12A/	IEC 60320 C15 and C19	XY, YZ, XZ @15.8A/	XY, YZ, XZ @15.8A/
C5-24VYM515A1	120/208V 5W+N+PE, 50/60Hz; 24A		NEMA L21-30P	208V, 50/60Hz; @41.6A		6xC19 @15.8A, 18xC15 @12A/	IEC 60320 C15 and C19	XY, YZ, XZ @15.8A/	XY, YZ, XZ @15.8A/



ISO VIEW

TOLERANCES (UNLESS OTHERWISE SPECIFIED)
LINEAR DIMENSIONS: .X = ± .500 .XX = ± .300 .XXX = ± .130
ANGULAR DIMENSIONS: X.X = ± .5° X.XX = ± .25°
SYMBOLS (Q #) = CRITICAL DIM. (S) = COSMETIC SURFACE

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
* INTERPRET DRAWING IAW ASME Y14.100-2000
* DIMENSIONING & TOLERANCING IAW ASME Y14.5M-1994
* REMOVE ALL BURRS AND SHARP EDGES .2 R MAX
* DIMENSIONS ARE IN MILLIMETERS
* TOLERANCES ARE: DECIMALS ±.3 ANGLES ±1.0°

DO NOT SCALE DRAWING

MATERIAL:

FINISH:

VENDOR PART NO:

THIRD ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY: MRAMSEY	08/04/2010
CHECKED BY:	
APPROVED BY:	
RELEASED BY:	

SERVER TECHNOLOGY INC.
1040 Sandhill Drive Reno, NV 89521

DRAWING TITLE:
METERED CDU MODEL
#C-24VD-L30MA, 208/240V, 20/30A
BASIC WIRING DIAGRAM

SIZE	CAGE CODE	DWG NO.	REV
D	04V90	495-0350-2	1

SCALE: 1/1 FILE NO: 495-0350-2.dwg SHEET 1 OF 1

D1-1 R3.dwt